


D1C-R300-11-830-025D

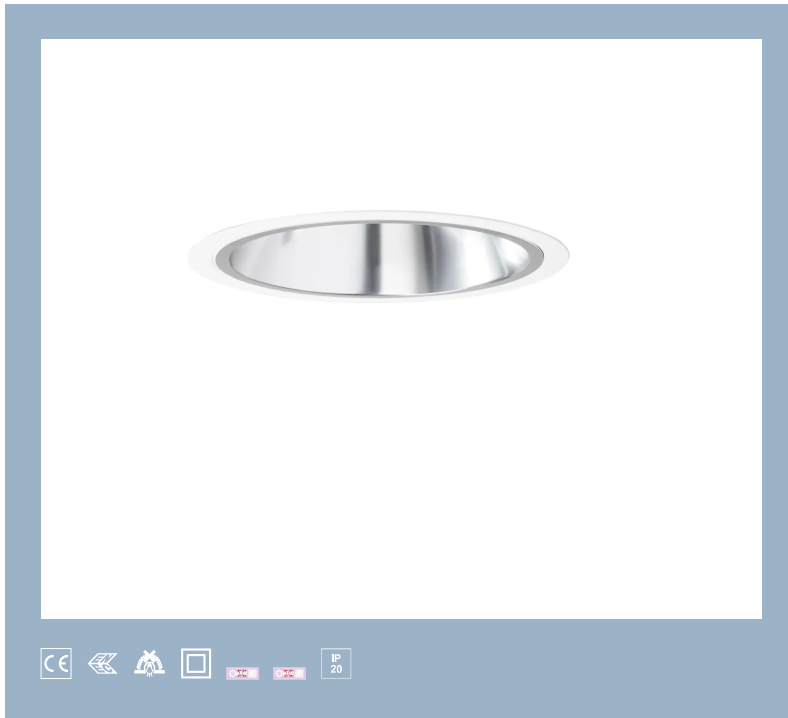

recessed luminaire • round

Application : General office area's, Auditoria,
General education area's

housing: injection-moulded aluminium

light source : LED • 3000 K

optics : reflector • aluminium, satin anodised •
medium wide-angle

UGR classification : <=22

luminous flux: 2550 lm

luminous efficacy : 138 lm/W

LLMF: 95% @ 50khrs (Tq=25°C)

Product information

Mechanical properties

dimensions : 220 mm x 120 mm

cut-out size : 205 mm x 120 mm

shape : individual round

colour: RAL9003 - white

trim: wafer trim

type : individual luminaire

IP: IP20

Electrical properties

driver: DALI dimmable

power : 18.5 W

voltage : 230-240V

frequency : 50Hz AC

photobiological safety : EN 62471: RISK GROUP 1
UNLIMITED

Luminance

luminous flux : 2550 lm

luminous efficacy : 138 lm/W


luminance @ 65° = : 1000 cd/m²

UGR classification =: <=22

luminous area : 0.02 m²

Average Luminances (Cd/m²) for 2550lm

Gamma	C0	C30	C45	C60	C90
45°	50471	50471	50471	50471	50471
50°	19724	19724	19724	19724	19724
55°	4537	4537	4537	4537	4537
60°	82	82	82	82	82
65°	9	9	9	9	9
70°	0	0	0	0	0
75°	0	0	0	0	0
80°	0	0	0	0	0
85°	0	0	0	0	0

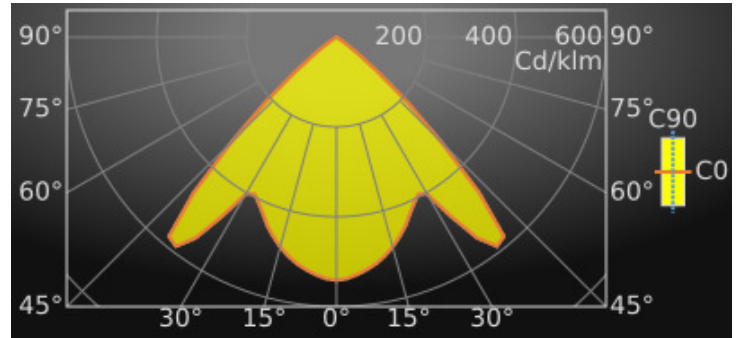

Classifications

CIE: 746 / 1000 / 1000 / 1000 / 1000

CIE FLUXCODE : 0.75 / 1.00 / 1.00 / 1.00 / 1.00

BZ: BZ2/3/BZ1/4/BZ2

CAE: Symmetrical

DIN: A60 (Nach Arbeitsblatt 7)

DIN_U: Phi u = 1.00

DIN_SU: Phi su = 0.72

UTE: 1.00 B + 0.00 T

Lifetime Data (Tq=25.0°C)

Time(hrs)	LLMF(%)	Cx(%)
10000	99	2
20000	98	4
30000	97	6
40000	96	8
50000	95	9
60000	95	11
70000	94*	13
80000	93*	15
90000	92*	17
100000	91*	18

UGR classification =

Corrected Glare Ratings for a Total Lamp Flux of 2550lm (S = 0.25H)

	Room Reflection Factors (%)														
	Ceiling	Walls	Floor	70	70	50	50	30	70	70	50	50	30		
	70	70	50	50	30	70	70	50	50	30	70	70	50	50	30
	50	30	50	30	30	50	30	50	30	30	50	30	50	30	30
	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20
Room Dimensions	Viewed Crosswise					Viewed Endwise									
X = 2H Y = 2H	22.9	24.5	23.2	24.7	25.0	22.9	24.5	23.2	24.7	25.0					
Y = 3H	22.7	24.1	23.0	24.4	24.7	22.7	24.1	23.0	24.4	24.7					
Y = 4H	22.6	23.9	23.0	24.2	24.5	22.6	23.9	23.0	24.2	24.5					
Y = 6H	22.5	23.7	22.9	24.0	24.4	22.5	23.7	22.9	24.0	24.4					
Y = 8H	22.5	23.7	22.9	24.0	24.3	22.5	23.7	22.9	24.0	24.3					
Y = 12H	22.5	23.6	22.9	23.9	24.2	22.5	23.6	22.9	23.9	24.2					
X = 4H Y = 2H	22.6	23.9	23.0	24.2	24.5	22.6	23.9	23.0	24.2	24.5					
Y = 3H	22.5	23.6	22.9	23.9	24.2	22.5	23.6	22.9	23.9	24.2					
Y = 4H	22.4	23.4	22.8	23.7	24.1	22.4	23.4	22.8	23.7	24.1					
Y = 6H	22.4	23.2	22.8	23.6	24.0	22.4	23.2	22.8	23.6	24.0					
Y = 8H	22.3	23.1	22.8	23.5	23.9	22.3	23.1	22.8	23.5	23.9					
Y = 12H	22.3	23.0	22.7	23.4	23.8	22.3	23.0	22.7	23.4	23.8					
X = 8H Y = 4H	22.3	23.1	22.8	23.5	23.9	22.3	23.1	22.8	23.5	23.9					
Y = 6H	22.2	22.9	22.7	23.3	23.8	22.2	22.9	22.7	23.3	23.8					
Y = 8H	22.2	22.8	22.7	23.2	23.7	22.2	22.8	22.7	23.2	23.7					
Y = 12H	22.2	22.7	22.7	23.1	23.7	22.2	22.7	22.7	23.1	23.7					
X = 12H Y = 4H	22.3	23.0	22.7	23.4	23.8	22.3	23.0	22.7	23.4	23.8					
Y = 6H	22.2	22.8	22.7	23.2	23.7	22.2	22.8	22.7	23.2	23.7					
Y = 8H	22.2	22.7	22.7	23.1	23.7	22.2	22.7	22.7	23.1	23.7					
UGR Variations with Observer Position for Luminaire Spacings S															
S = 1.0H	+2.9		-13.9		+2.9		-13.9								
S = 1.5H	+5.6		+0.0		+5.6		+0.0								
S = 2.0H	+7.6		+0.0		+7.6		+0.0								

Luminous intensities in cd

Intensity for 2550lm

Gamma	C0	C45	C90
0°	1379.9	1379.9	1379.9
5°	1352.2	1352.2	1352.2
10°	1303.6	1303.6	1303.6
15°	1231.9	1231.9	1231.9
20°	1142.0	1142.0	1142.0
25°	1041.1	1041.1	1041.1
30°	1026.5	1026.5	1026.5
35°	1390.9	1390.9	1390.9
40°	1476.7	1476.7	1476.7
45°	838.9	838.9	838.9
50°	298.0	298.0	298.0
55°	61.2	61.2	61.2
60°	1.0	1.0	1.0
65°	0.1	0.1	0.1
70°	0.0	0.0	0.0
75°	0.0	0.0	0.0
80°	0.0	0.0	0.0
85°	0.0	0.0	0.0
90°	0.0	0.0	0.0

Colour properties

Correlated Colour Temperature : 3000

Ra: CRI (Ra) 80



Efficiency

Utilisation Factors according to IES (%)

	Room Reflection Factors (%)									
Ceiling	80	80	80	50	50	50	30	30	30	0
Walls	50	30	10	50	30	10	50	30	10	0
Floor	20	20	20	20	20	20	20	20	20	0
RCR = 1	109	107	105	103	101	100	99	98	97	91
2	99	95	93	94	91	89	91	88	86	82
3	90	85	81	86	82	79	83	80	77	73
4	82	76	72	78	73	70	76	72	69	66
5	75	68	64	71	66	62	70	65	62	59
6	68	61	57	65	60	56	64	59	55	53
7	62	56	51	60	54	50	59	54	50	47
8	57	50	46	55	49	45	54	49	45	43
9	53	46	41	51	45	41	50	45	41	39
10	49	42	38	48	42	37	47	41	37	35

Utilisation Factors according to LiTG (%)

	Room Reflection Factors (%)									
Ceiling	80	80	80	50	50	50	50	50	30	0
Walls	50	30	50	30	50	30	50	30	30	0
Floor	30	30	10	10	30	30	10	10	10	0
k = 0.60	59	51	56	50	57	50	55	49	49	43
0.80	73	65	69	63	70	64	67	62	61	56
1.00	82	74	76	70	78	72	74	69	68	63
1.25	91	84	83	78	86	81	81	77	76	72
1.50	97	90	88	84	91	86	86	82	81	77
2.00	104	97	93	89	97	92	90	87	86	82
2.50	109	104	96	93	101	97	94	91	90	86
3.00	113	109	99	97	105	102	97	95	93	90
4.00	117	113	101	99	107	104	98	96	95	91
5.00	120	116	103	101	109	107	100	98	97	93

Dimensional drawing

