


# D1C-R300-11-840-015S

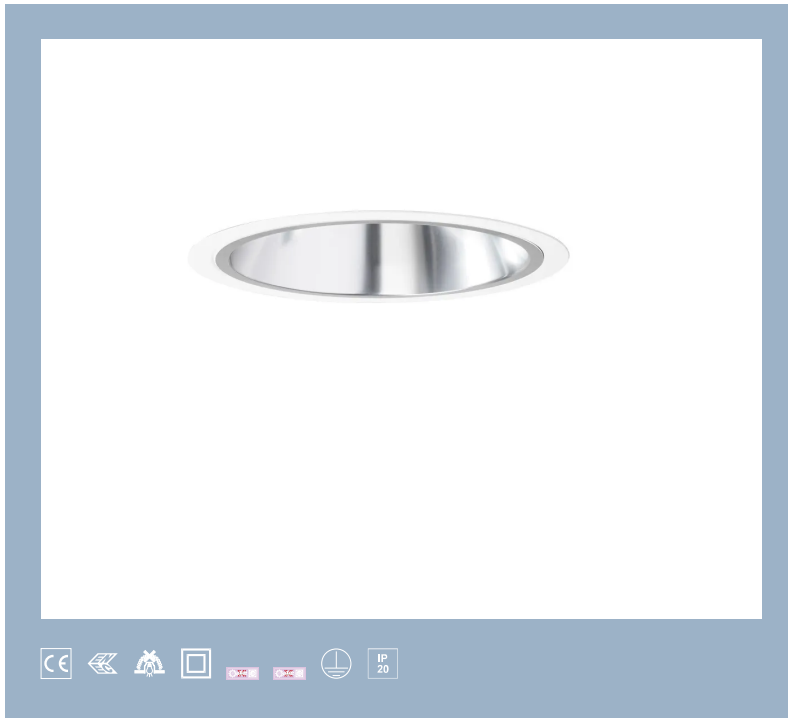

**recessed luminaire • round**

**Application :** General office area's, Auditoria,  
General education area's

**housing:** injection-moulded aluminium

**light source :** LED • 4000 K

**optics :** reflector • aluminium, satin anodised •  
medium wide-angle

**UGR classification :** <=22

**luminous flux:** 1450 lm

**luminous efficacy :** 150 lm/W

**LLMF:** 96% @ 50khrs (Tq=25°C)

## Product information

### Mechanical properties

**dimensions :** 220 mm x 120 mm

**cut-out size :** 205 mm x 120 mm

**shape :** individual round

**colour:** RAL9003 - white

**trim:** wafer trim

**type :** individual luminaire

**IP:** IP20

### Electrical properties

**driver:** not dimmable

**power :** 9.7 W

**voltage :** 230-240V

**frequency :** 50Hz AC

**photobiological safety :** EN 62471: RISK GROUP 1  
UNLIMITED

## Luminance

luminous flux : 1450 lm

luminous efficacy : 150 lm/W


luminance @ 65° = : 1000 cd/m<sup>2</sup>

UGR classification =: <=22

luminous area : 0.02 m<sup>2</sup>

Average Luminances (Cd/m<sup>2</sup>) for 1450lm

Gamma	C0	C30	C45	C60	C90
45°	28699	28699	28699	28699	28699
50°	11216	11216	11216	11216	11216
55°	2580	2580	2580	2580	2580
60°	47	47	47	47	47
65°	5	5	5	5	5
70°	0	0	0	0	0
75°	0	0	0	0	0
80°	0	0	0	0	0
85°	0	0	0	0	0

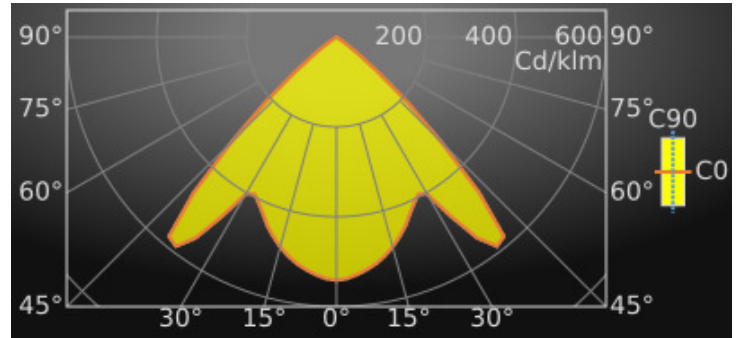

## Classifications

CIE: 746 / 1000 / 1000 / 1000 / 1000

CIE FLUXCODE : 0.75 / 1.00 / 1.00 / 1.00 / 1.00

BZ: BZ2/3/BZ1/4/BZ2

CAE: Symmetrical

DIN: A60 (Nach Arbeitsblatt 7)

DIN\_U: Phi u = 1.00

DIN\_SU: Phi su = 0.72

UTE: 1.00 B + 0.00 T

Lifetime Data (Tq=25.0°C)

Time(hrs)	LLMF(%)	Cx(%)
10000	99	2
20000	98	4
30000	97	6
40000	97	8
50000	96	9
60000	95	11
70000	95*	13
80000	94*	15
90000	93*	17
100000	93*	18

UGR classification =

Corrected Glare Ratings for a Total Lamp Flux of 1450lm (S = 0.25H)

	Room Reflection Factors (%)														
	Ceiling	Walls	Floor	70	70	50	50	30	70	70	50	50	30		
	70	70	50	50	30	70	70	50	50	30	70	70	50	50	30
	50	30	50	30	30	50	30	50	30	30	50	30	50	30	30
	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20
Room Dimensions	Viewed Crosswise					Viewed Endwise									
X = 2H Y = 2H	20.9	22.5	21.2	22.8	23.0	20.9	22.5	21.2	22.8	23.0					
Y = 3H	20.7	22.2	21.1	22.4	22.7	20.7	22.2	21.1	22.4	22.7					
Y = 4H	20.7	22.0	21.0	22.3	22.6	20.7	22.0	21.0	22.3	22.6					
Y = 6H	20.6	21.8	21.0	22.1	22.4	20.6	21.8	21.0	22.1	22.4					
Y = 8H	20.6	21.7	20.9	22.0	22.3	20.6	21.7	20.9	22.0	22.3					
Y = 12H	20.5	21.6	20.9	21.9	22.3	20.5	21.6	20.9	21.9	22.3					
X = 4H Y = 2H	20.7	22.0	21.0	22.3	22.6	20.7	22.0	21.0	22.3	22.6					
Y = 3H	20.5	21.6	20.9	21.9	22.3	20.5	21.6	20.9	21.9	22.3					
Y = 4H	20.5	21.4	20.9	21.7	22.1	20.5	21.4	20.9	21.7	22.1					
Y = 6H	20.4	21.2	20.8	21.6	22.0	20.4	21.2	20.8	21.6	22.0					
Y = 8H	20.4	21.1	20.8	21.5	21.9	20.4	21.1	20.8	21.5	21.9					
Y = 12H	20.3	21.0	20.8	21.4	21.9	20.3	21.0	20.8	21.4	21.9					
X = 8H Y = 4H	20.4	21.1	20.8	21.5	21.9	20.4	21.1	20.8	21.5	21.9					
Y = 6H	20.3	20.9	20.7	21.4	21.8	20.3	20.9	20.7	21.4	21.8					
Y = 8H	20.2	20.8	20.7	21.3	21.7	20.2	20.8	20.7	21.3	21.7					
Y = 12H	20.2	20.7	20.7	21.2	21.7	20.2	20.7	20.7	21.2	21.7					
X = 12H Y = 4H	20.3	21.0	20.8	21.4	21.9	20.3	21.0	20.8	21.4	21.9					
Y = 6H	20.2	20.8	20.7	21.3	21.7	20.2	20.8	20.7	21.3	21.7					
Y = 8H	20.2	20.7	20.7	21.2	21.7	20.2	20.7	20.7	21.2	21.7					
UGR Variations with Observer Position for Luminaire Spacings S															
S = 1.0H	+2.9		-13.9		+2.9		-13.9								
S = 1.5H	+5.6		+0.0		+5.6		+0.0								
S = 2.0H	+7.6		+0.0		+7.6		+0.0								

Luminous intensities in cd

Intensity for 1450lm

Gamma	C0	C45	C90
0°	784.7	784.7	784.7
5°	768.9	768.9	768.9
10°	741.2	741.2	741.2
15°	700.5	700.5	700.5
20°	649.4	649.4	649.4
25°	592.0	592.0	592.0
30°	583.7	583.7	583.7
35°	790.9	790.9	790.9
40°	839.7	839.7	839.7
45°	477.0	477.0	477.0
50°	169.5	169.5	169.5
55°	34.8	34.8	34.8
60°	0.5	0.5	0.5
65°	0.0	0.0	0.0
70°	0.0	0.0	0.0
75°	0.0	0.0	0.0
80°	0.0	0.0	0.0
85°	0.0	0.0	0.0
90°	0.0	0.0	0.0

Colour properties

Correlated Colour Temperature : 4000

Ra: CRI (Ra) 80



## Efficiency

Utilisation Factors according to IES (%)

	Room Reflection Factors (%)									
Ceiling	80	80	80	50	50	50	30	30	30	0
Walls	50	30	10	50	30	10	50	30	10	0
Floor	20	20	20	20	20	20	20	20	20	0
RCR = 1	109	107	105	103	101	100	99	98	97	91
2	99	95	93	94	91	89	91	88	86	82
3	90	85	81	86	82	79	83	80	77	73
4	82	76	72	78	73	70	76	72	69	66
5	75	68	64	71	66	62	70	65	62	59
6	68	61	57	65	60	56	64	59	55	53
7	62	56	51	60	54	50	59	54	50	47
8	57	50	46	55	49	45	54	49	45	43
9	53	46	41	51	45	41	50	45	41	39
10	49	42	38	48	42	37	47	41	37	35

Utilisation Factors according to LiTG (%)

	Room Reflection Factors (%)									
Ceiling	80	80	80	50	50	50	50	50	30	0
Walls	50	30	50	30	50	30	50	30	30	0
Floor	30	30	10	10	30	30	10	10	10	0
k = 0.60	59	51	56	50	57	50	55	49	49	43
0.80	73	65	69	63	70	64	67	62	61	56
1.00	82	74	76	70	78	72	74	69	68	63
1.25	91	84	83	78	86	81	81	77	76	72
1.50	97	90	88	84	91	86	86	82	81	77
2.00	104	97	93	89	97	92	90	87	86	82
2.50	109	104	96	93	101	97	94	91	90	86
3.00	113	109	99	97	105	102	97	95	93	90
4.00	117	113	101	99	107	104	98	96	95	91
5.00	120	116	103	101	109	107	100	98	97	93

## Dimensional drawing

